




mini

Key Features

- USB capture video complying with UVC for live streaming
- 4CH HDMI inputs
- 2" TFT display on board to Live preview four inputs
- Auto cut and manual switch (T-Bar)
- 14 transition effects on T-Bar
- Support PIP (Picture-In-Picture)
- Audio offers embedded or external source to select
- Support switch between 6-Picture PVW and PGM to HDMI Out
- Control by PC or mobile phone (via APP)
- Compact design

Application Diagram

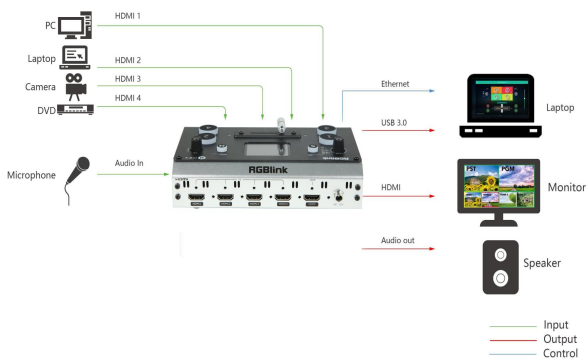

Order Codes

Product Code	Item
230-0001-01-0	mini
230-0001-02-0	mini+




mini+

- Advanced features on mini+

- ⊙ Logo
- ⊙ Chroma Key
- ⊙ PTZ control

Dimensions

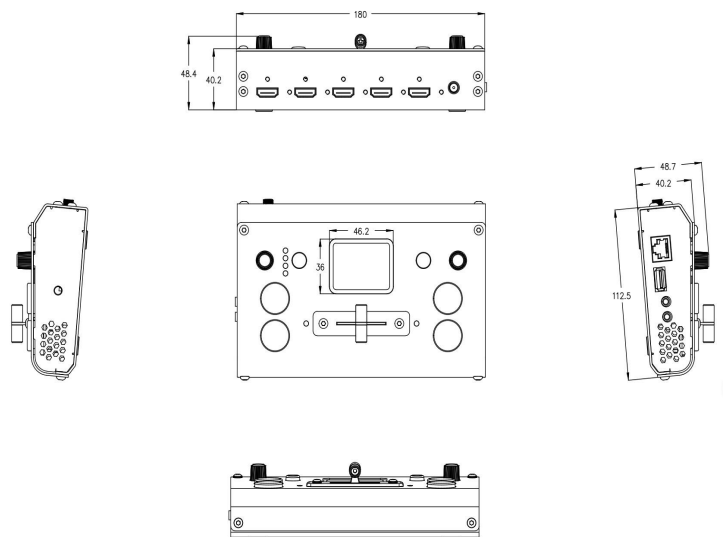

Specification

Connectors	Input	HDMI In	4×HDMI-A
	Output	HDMI Out	1×HDMI-A
		USB 3.0	1×USB TypeA
	Audio	In	1×3.5mm Stereo Jack
		Out	1×3.5mm Stereo Jack
Communication	LAN	1×RJ45	
Power		1×DC Jack	
Performance	Input Resolutions	HDMI	
		SMPTE	720p@50/60 1080i@50 1080p@23/24/30/50/60
		VESA	1024×768@60 1280×720@60 1280×768@60 1280×800@60 1280×1024@60 1360×768@60 1366×768@60 1440×900@60 1600×1200@60 1680×1050@60 1920×1080@60 1920×1200@60
	Output Resolutions	HDMI	
	SMPTE	720p@60 1080p@60	
	VESA	1024×768@60 1280×720@60 1280×768@60 1280×1024@60 1360×768@60 1920×1080@60	
	USB H.265	1024×768@60 1280×720@60 1280×1024@60 1360×768@60 1920×1080@60	
Supported Standards	HDMI	1.3	
	USB	3.0	
	H.265	ITU-T H.265/ ISO/IEC 23008-2	
Power	Input Voltage	DC 12V/1.5A	
	Constant Power	13.2W	
	Max Power	18W	
Environment	Temperature	-0℃ ~70℃	
	Humidity	10%~85%	
Physical	Weight	Net	0.6kg
		Packaged	1.1kg
	Dimension	Net	180mm×112.5mm×48.7mm
		Packaged	255mm×145mm×85mm

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com

Headquarter: S601 Weiye Building, Torch Hi-Tech Development Zone, Xiamen, Fujian, P.R.C.

RGBlink[®]

www.rgblink.com



Specifications are correct at time of printing and subject to change or alteration without notice.