

Vertical Video Made Easy.

Industry's First Vertical PTZ Camera For Vertical Content Creation & Live Streaming.



PRO LEVEL QUALITY

FULL HD 1080P60

12X OPTICAL ZOOM

BORN VERTICAL



SUPER EASY TO USE

ONE AND ONLY


REALLY AFFORDABLE

PAN - TILT - ZOOM

VERTICAL VIDEO HAS TAKEN OVER.


Huge brands are all jumping aboard the vertical video train. Consumers consider brands that advertise with vertical video 'more innovative'.

If you aren't posting a video in vertical, you're falling behind.

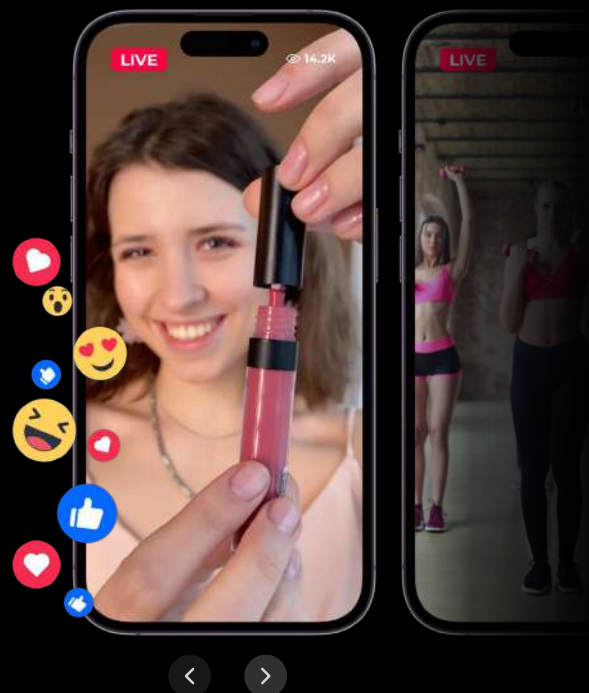

Switch Easily With Multiple Preset Positions

Store and recall 255 specific pan/tilt/zoom positions quickly with your cameras

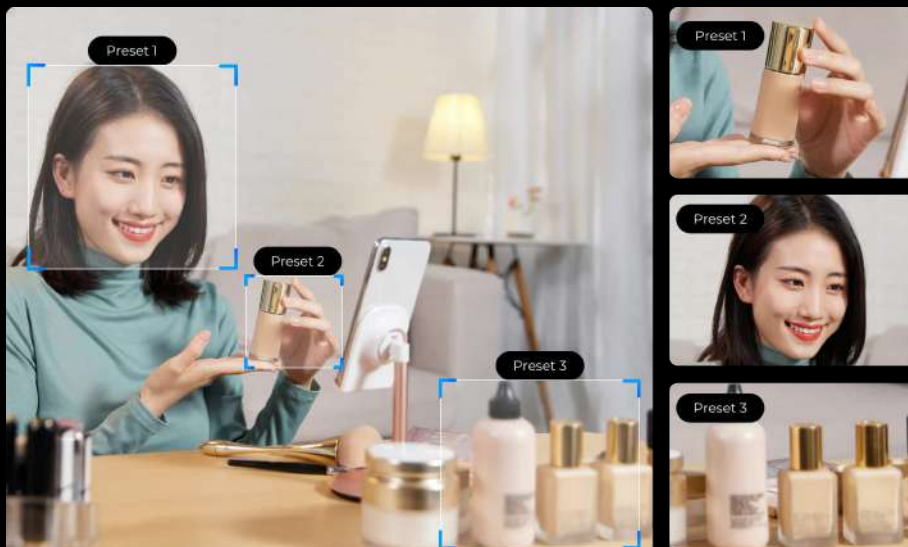

Remote Control

Support a wide rotation range of $\pm 170^\circ$ horizontally and of $30^\circ \sim +90^\circ$ vertically.

Control the camera remotely for free angle rotation through the RS232 serial port.

Perfect for one-man show. No additional crew needed.



TOF Instantaneous Auto Focus

Focus instantly and precisely



72.5° Wide-angle Lens With 12x Optical Zoom

Want to know how to live stream 24/7 with YoloCast?

YES, I do!





Professional Color Mode, HD Image Quality



4:2:2 10 bit PRO color mode



1/2.8-inch HD CMOS sensor



2.07 million effective pixels



1920x1080 images



Camera Noise Reduction



Backlight Compensation



Stunning low light performance



The Best Companion For Instream To Vertically Stream to Instagram, TikTok

YoloLiv' Own VertiCam. Selling in China since 2019. Better tech optimization for Instream.

LEARN MORE



VertiCam


Overview

Tech Specs

Exterior



Dimensions & Weight

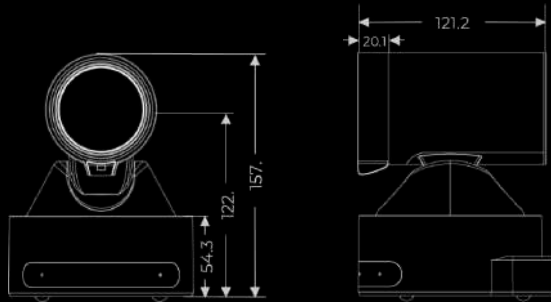

Ports



- 1 USB3.0 Interface
- 2 HDMI Interface
- 3 LINE IN Interface
- 4 RS232 IN Interface
- 5 RS232 OUT Interface
- 6 DC 12V Interface

CAMERA	
Video System	1080P60, 1080P50, 1080P30, 1080P25, 720P60, 720P50
Sensor	1/2.8-inch, CMOS, Effective Pixel: 2.07M
Scanning Mode	Progressive
Lens	12x, f=3.5mm ~ 42.3mm, F1.8 - F2.8
Digital Zoom	16x
Minimum Illumination	0.5 Lux @ (F1.8, AGC ON)
Shutter	1/30s - 1/10000s
White Balance	Auto, Indoor, Outdoor, One Push, Manual, VAR
Backlight Compensation	Support
Digital Noise Reduction	2D&3D Digital Noise Reduction
SNR	≥55dB
Horizontal FOV	72.5° ~ 6.9°
Vertical FOV	44.8° ~ 3.9°
Pan Angle	±170°
Tilt Angle	±170°

Want to know how to live stream 24/7 with YoloCast? [YES, I do!](#)

VertiCam

Overview

Tech Specs

Image Type	Support
Image Freeze	Support
Preset Position	255
Preset Accuracy	0.1°
MIC Pick-up Distance	6m

USB FEATURES

Operate System	Windows 7, Windows 8, Windows 10, Mac OS X, Linux, Android
Color System/ Compression	MJPEG/YUY2
Video Format	YUY2 (ISOC): 1080P@60fps (max.) MJPEG: 1080P@60fps (max.)
USB Audio	Support
USB Video Communication Protocol	UVC 1.1
UVC PTZ	Support

INTERFACES

USB Interface	1 x USB3.0, Type-B
HDMI Interface	1 x HDMI 1.4b
Audio Interface	1 x LINE IN, 3.5mm 1 x RS232 IN, 8pin min DIN; Max. Distance: 30m; Protocol:
Communication Interface	VISCA/Pelco-D/Pelco-P 1 x RS232 OUT, 8pin min DIN; Max. Distance: 30m; Protocol: VISCA
Power Jack	network use only JEITA type (DC IN 12V)

GENERAL SPECIFICATIONS

Input Voltage	DC 12V
Input Current	1.5A (max.)
Operating Temperature	-10°C - 40°C
Storage Temperature	-40°C - 60°C
Power Consumption	12W (max.)
Dimension	128mm x 118mm x 157.9mm
Net Weight	1.0Kg

Products

YoloBox
YoloBox Pro
YoloBox Mini
Instream
VertiCam
YoloCast
YoloMax
Overlay Lab

Solutions

Live Selling
Sports
Weddings
Church
Videographer
Education

Resources

Blog
Customer Stories
Marketing Kit
Version History
What's New (YoloCast)
EU Shipping Documents

Help

Compare
Help Center
Request a Demo
Where to Buy
FaceBook Community

Company

About Us
Careers
Events
Contact Us

Partners

Partner Program
Become a Partner
YoloLiv Certified Partner™ training

